


# BALUN MINI 1.6/5.6 (M)

## 75/120 Ω, 2-8Mbit/s

### In-Line, Snap On

# B04001010/L

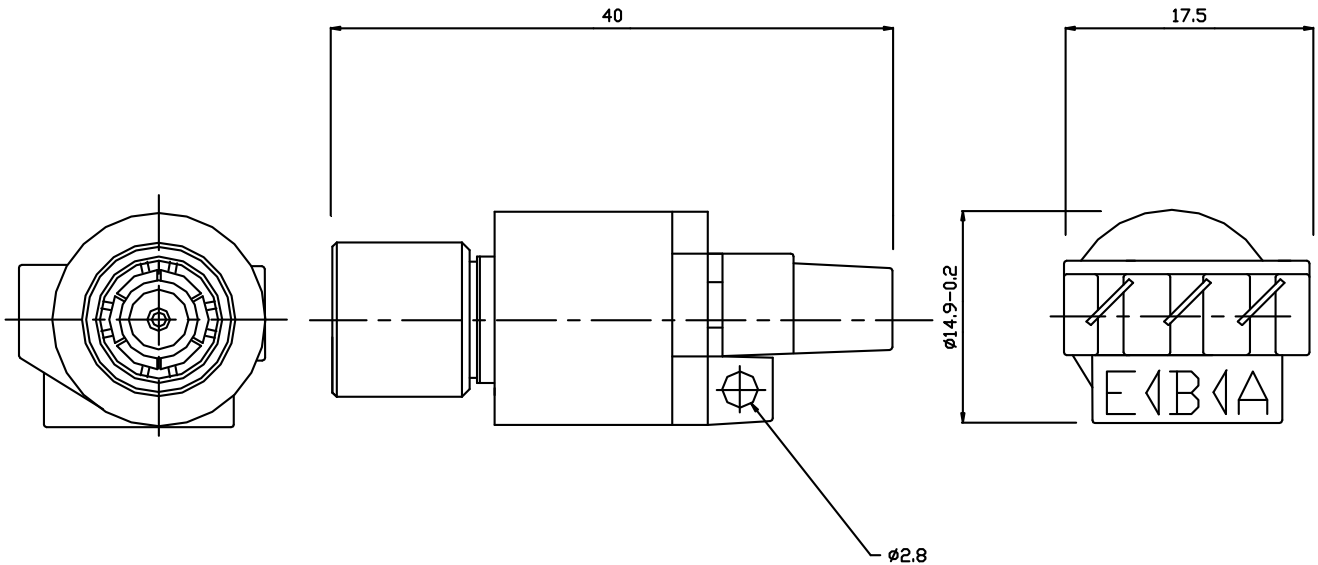

### ELECTRICAL

Matching Impedance: 75 ohm unbalanced coaxial to 120 ohm balanced twisted pair  
 Bit Rates: From 2Mbit/s up to 45Mbit/s as ITU-T Recommendation G.703 Line Code,  
 Return Loss: >10 dB in the frequency range of 51~102kHz;  
 >15 dB in the frequency range of 1~70MHz.  
 Insertion Loss: <0.5dB @ 1MHz; <0.4dB @ 4MHz; <0.6dB @ 17MHz  
 <0.9dB in the range of 0.2~70 MHz  
 Cross Talk: >60dB in the range of 1.0~70 MHz between 2 baluns mounted on DDF strip.  
 Pulse Shape: 2Mbit/s, 8Mbit/s, 34MHz and 45MHz as per G.703  
 Signal Levels: 2.37V nominal peak voltage for 2Mbit/s and 8Mbit/s at the coaxial end as per G.703.  
 1V nominal peak voltage for 34Mbit/s at the coaxial end as per G.703.  
 45Mbit/s conforms to its interface pulse mask in G.703.

### MATERIALS

Coax Connector Outer Contact:	CuBe	Finish Cu/Ni/Au
Coax Connector Snap Ring:	CuBe	
Coax Connector Body:	Brass	Finish Cu/Ni
Coax Connector Insulator:	PTFE	
Coax Connector Inner Contact:	Brass	Finish Cu/Ni/Au
Balun Body:	Brass Alloy AS 1567 Type 385. Finish Cu/NiSn	
Outer Sleeve and Base Moulding:	Noryl Black	
IDC Moulding:	Polyester White	

### COAXIAL CONNECTOR (75 ohm)

1.6/5.6 Series: To IEC 169-13.

### IDC CONTACTS

Wire Size: 0.4mm to 0.65mm conductor diameter,  
 Insulation diameter 0.7mm to 1.4mm.  
 Finish: Silver plated  
 Mating Cycles: 50

### ENVIRONMENTAL

Working Temperature: -10 °C to 75 °C

### TERMINATION

IDC Termination: Krone Terminating Tool

