

ELECTRICAL

Matching Impedance: 75 ohm unbalanced coaxial to 120 ohm balanced twisted pair
 Bit Rates: From 2Mbit/s up to 45Mbit/s as ITU-T Recommendation G.703 Line Code,
 Return Loss: >10 dB in the frequency range of 51~102kHz;
 >15 dB in the frequency range of 1~70MHz.
 Insertion Loss: <0.5dB @ 1MHz; <0.4dB @ 4MHz; <0.6dB @ 17MHz
 <0.9dB in the range of 0.2~70 MHz
 Cross Talk: >60dB in the range of 1.0~70 MHz between 2 baluns mounted on DDF strip.
 Pulse Shape: 2Mbit/s, 8Mbit/s, 34MHz and 45MHz as per G.703
 Signal Levels: 2.37V nominal peak voltage for 2Mbit/s and 8Mbit/s at the coaxial end as per G.703.
 1V nominal peak voltage for 34Mbit/s at the coaxial end as per G.703.
 45Mbit/s conform to its interface pulse mask in G.703.

MATERIALS

Body: Brass Alloy AS 1567 Type 385. Finish Cu/Ni
 Insulator: PTFE
 Inner Contact: Brass Alloy AS 1567 Type 385. Finish Cu/Ni/Au
 Base Moulding: Noryl Black
 Outer Sleeve Moulding: Noryl White
 IDC Moulding: Polyester White

COAXIAL CONNECTOR (75 ohm)


BNC Series: To IEC 169-8.

IDC CONTACTS

Wire Size: 0.4mm to 0.65mm conductor diameter,
 Insulation diameter 0.7mm to 1.4mm.
 Finish: Silver plated
 Mating Cycles: 50

ENVIRONMENTAL

Working Temperature: -10 °C to 75 °C

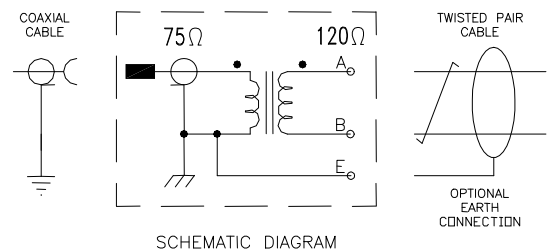

TERMINATION

IDC Termination: Krone Terminating Tool