




E875 Front

Specifications

ITEM	PORTS	FREQUENCY RANGE(MHZ)	SPECIFICATION (dB)
Insertion Loss	IN-OUT	5-400	3.5 Max
		400-500	3.7 Max
		500-600	3.8 Max
		600-1000	4.0 Max
Insertion Loss	OUT-OUT	5-400	24 Min
		400-500	27 Min
		500-600	25 Min
		600-1000	25 Min
Return Loss	INPUT	5-400	21 Min
		400-500	20 Min
		500-600	20 Min
		600-1000	19 Min
Return Loss	OUTPUT	5-400	21 Min
		400-500	20 Min
		500-600	20 Min
		600-1000	19 Min

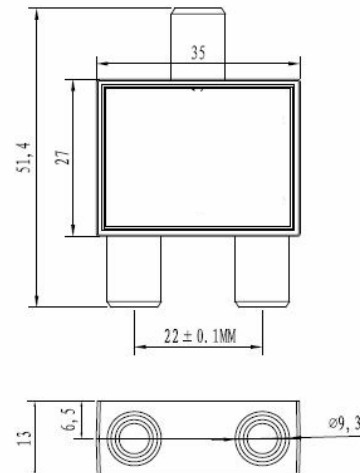

Coaxial connectors with screw coupling for use in 75ohm systems.