




E876 Front

Specifications

Insertion Loss	5~40MHZ	<1.1dB	
	40~470MHZ	<0.9dB	
	470~862MHZ	<1.1dB	
	862~1000MHZ	<1.2dB	
Insertion Loss	5~40MHZ	11dB~14dB	
	40~1000MHZ	11.5dB~13.5dB	
	Return Loss (IN)	5~40MHZ	<-20dB
		40~470MHZ	<-22dB
470~862MHZ		<-22dB	
862~1000MHZ		<-14dB	
Return Loss (OUT)	5~40MHZ	<-20dB	
	40~470MHZ	<-22dB	
	470~862MHZ	<-22dB	
	862~1000MHZ	<-14dB	
Return Loss (TAP)	5~40MHZ	<-20dB	
	40~470MHZ	<-22dB	
	470~862MHZ	<-22dB	
	862~1000MHZ	<-14dB	
Isolation (OUT-TAP)	5~10MHZ	<-28dB	
	10~40MHZ	<-31.5dB	
	40~862MHZ	<-31.5dB	
	862~1000MHZ	<-24.5dB	

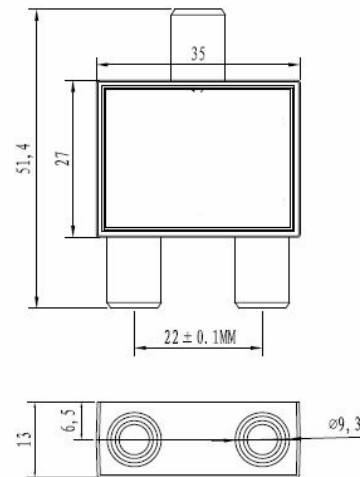

Coaxial connectors with screw coupling for use in 75ohm systems.